
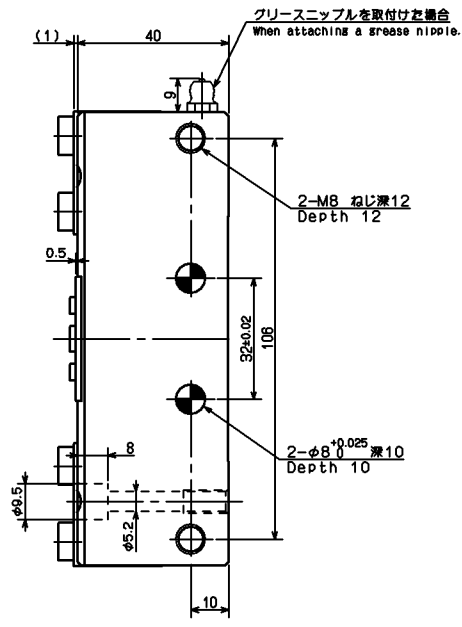
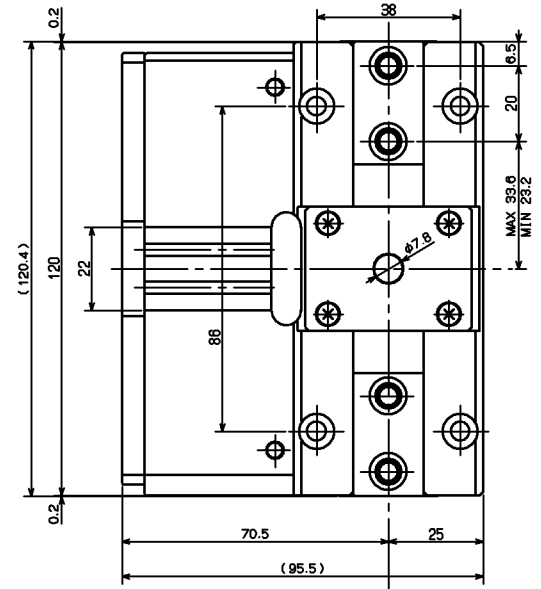
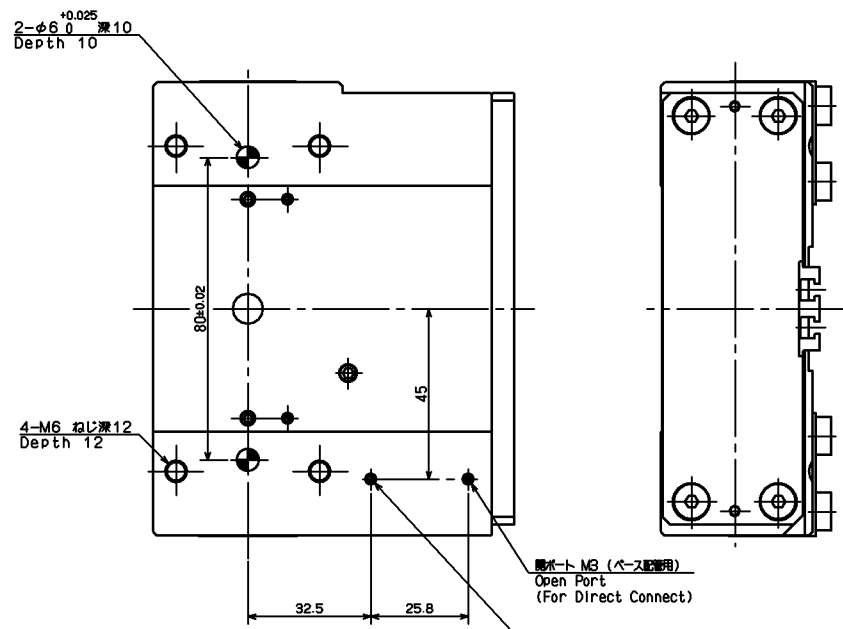




A  
B  
C  
D  
E  
F

1 2 3 4 5 6 7 8

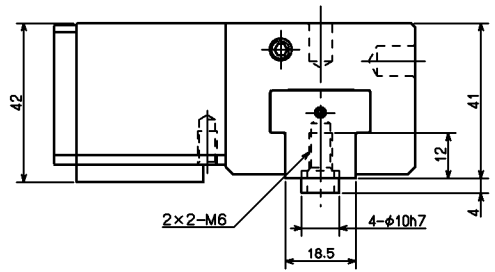

開ポート M3 (ベース取付用)  
Open Port  
(For Direct Connect)

閉ポート M3 (ベース取付用)  
Close Port  
(For Direct Connect)

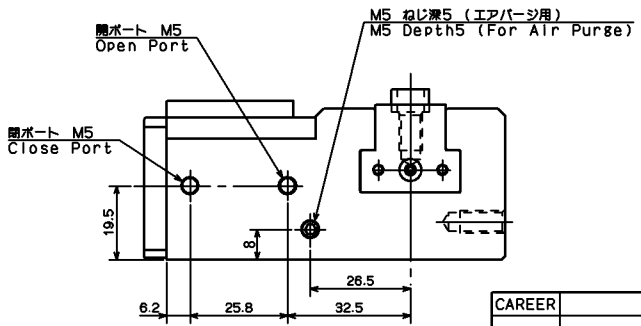

寸法区分 mm	切削加工	機械加工	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差
1以上-4以下	▽0.1	▽0.3	±0.5	▽0.05	▽0.08	▽0.1	▽0.15	▽0.2	▽0.3	▽0.4	▽0.5	▽0.6	▽0.7	▽0.8	▽0.9	▽1.0	▽1.2	▽1.5	▽2.0	▽2.5
4以上-15以下	▽0.15	▽0.4	±0.7	▽0.08	▽0.12	▽0.18	▽0.25	▽0.35	▽0.5	▽0.6	▽0.8	▽1.0	▽1.2	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5
15以上-30以下	▽0.2	▽0.5	±1.0	▽0.1	▽0.15	▽0.22	▽0.3	▽0.4	▽0.6	▽0.8	▽1.0	▽1.2	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0
30以上-100以下	▽0.3	▽0.7	±1.5	▽0.15	▽0.2	▽0.3	▽0.4	▽0.6	▽0.8	▽1.0	▽1.2	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0	▽9.0
100以上-200以下	▽0.4	▽1.0	±2.0	▽0.2	▽0.25	▽0.4	▽0.5	▽0.8	▽1.0	▽1.2	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0	▽9.0	▽11.0
200以上-500以下	▽0.5	▽1.5	±3.0	▽0.25	▽0.3	▽0.5	▽0.6	▽1.0	▽1.2	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0	▽9.0	▽11.0	▽14.0
500以上-1000以下	▽0.6	▽2.0	±4.0	▽0.3	▽0.4	▽0.6	▽0.8	▽1.2	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0	▽9.0	▽11.0	▽14.0	▽18.0
1000以上-2000以下	▽0.7	▽2.5	±5.0	▽0.35	▽0.45	▽0.7	▽1.0	▽1.5	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0	▽9.0	▽11.0	▽14.0	▽18.0	▽24.0
2000以上-5000以下	▽0.8	▽3.0	±6.0	▽0.4	▽0.5	▽0.8	▽1.2	▽1.8	▽2.2	▽2.8	▽3.5	▽4.5	▽5.5	▽7.0	▽9.0	▽11.0	▽14.0	▽18.0	▽24.0	▽32.0

CAREER			SCALE	TYPE	NPGT10	WEIGHT	kg
MANAGER	CHIEF	DRAWN BY	1:1	NAME	グripper		
Kitasawa Corporation			3rd ANGLE	NAME	NPGT10 ガウイ		
DATE			DRW NO.	61G 28 7878			8